



7500 ± 70MM

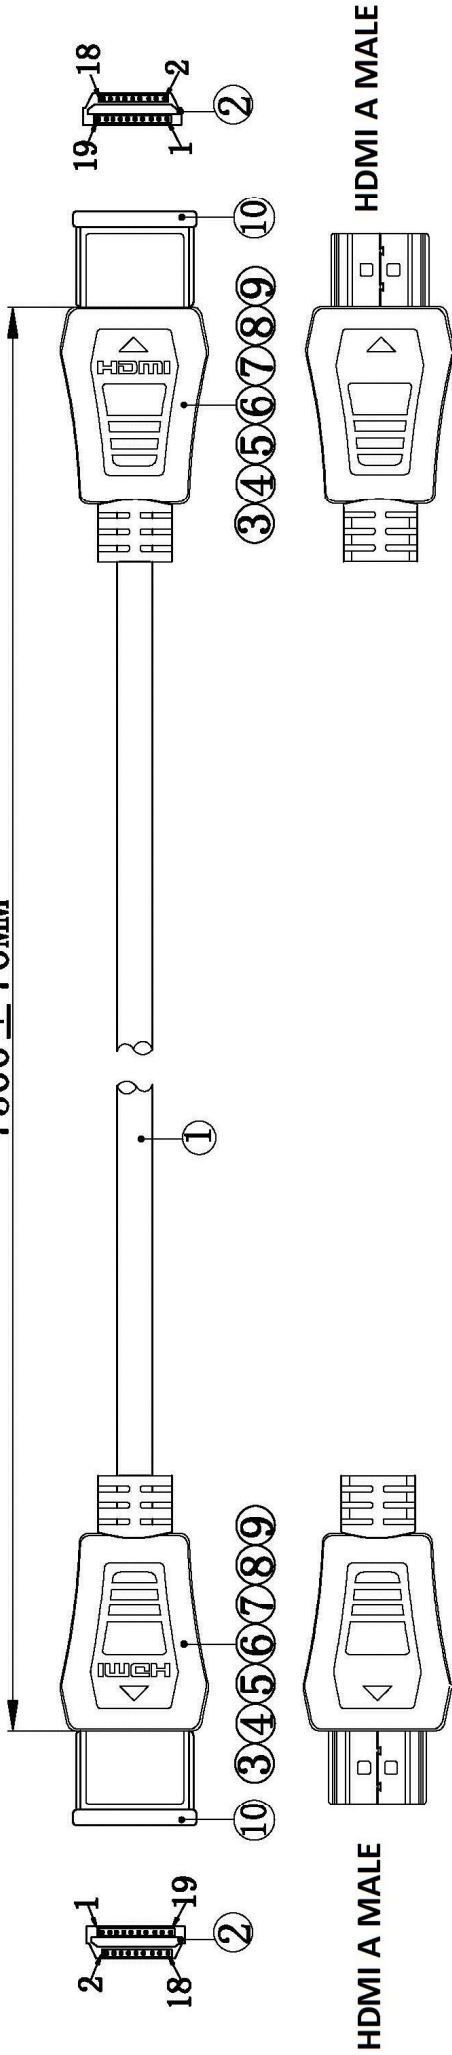

Pin Out

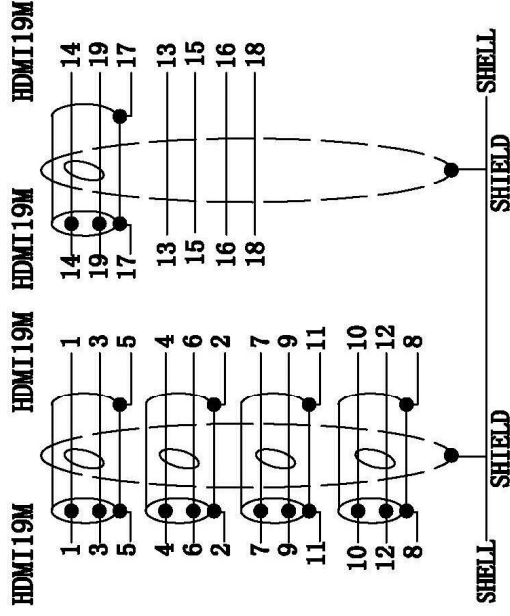

| NO | Material    | Product specification  | Unit | QTY   | Remarks |
|----|-------------|--|------|-------|---------|
| ①  | Cable       | UI-21550 (1P*28##+AL+D+M)*5C+4C*28##+AL+D+H OD7.3 1.4V 160 AL Black printing: High Speed HDMI™ Cable With Ethernet E119832-T 凡 AWM STYLE 21550 80°C 30V VW-1 HDMI CABLE—RoHS Compliant— LSOH LSOH Jacket | M    | 7.50  |         |
| ②  | Connector   | HDMI A TYPE 19P M Nickel Plated  | PCS  | 2     |         |
| ③  | Tin line    | Lead-free Green Wire ODO.8 1000g RoHS  | G    | 0.56  |         |
| ④  | Tube (1)    | Black Shrink-Heat Tube OD:1.0MM LSOH   | M    | 0.220 | 10*22mm |
| ⑤  | Tube (2)    | Black Shrink-Heat Tube OD:2.5MM LSOH   | M    | 0.110 | 10*11mm |
| ⑥  | Inner mold  | LD-PE LSOH   | KG   | 0.004 |         |
| ⑦  | Mask Tape   | 2.3CM RoHS   | M    | 0.12  | 2*60mm  |
| ⑧  | Copper foil | 2.9CM Copper Foil RoHS   | M    | 0.12  | 2*60mm  |
| ⑨  | Outer mold  | Black PVC 45P LSOH   | KG   | 0.015 |         |
| ⑩  | Dust cover  | LD-PE LSOH   | PCS  | 2     |         |

Test parameters: insulation resistance: 10mΩ  
 conduction impedance: 5Ω  
 high-pressure test: 300v



**SECOMP**

Unit: mm

Item no. 11.99.5736

Desc. VALUE HDMI High Speed Cable w/Ethernet A-A, M/M, 7.5m, black

DRAWING NO:

DATE: 2015/06/12

DJSTW0341506001

DRAWING: WangLei